



COMBiLiFT

COMBi-SC

COMBi - STRADDLE CARRIER



⇒ Side Shift
200mm/8"



⇐ Side Shift
200mm/8"



COMBi - STRADDLE CARRIER






SPECIFICATIONS

COMBi - SC

Patents Pending- International Application No. PCT/EP2010/051971

REF	DESCRIPTION	Metric	Imperial
1	Overall Length	8982mm	29' 6"
2	Overall Width	5100mm	16' 9"
3	Overall Height	5300mm	17' 6"
4	Ground Clearance Under Cab	250mm	9½"
5	Height Over Cab	2850mm	80 ½"
6	Track Front	3845mm	151 ½"
7	Wheelbase	5775mm	227 ½"
8	Width Load Area	3230mm	127"
9	Height Load Area	4600mm	181"
10	Minimum Outside Radius	14500mm	47 ½"
11	Overhang Front	1603mm	63"
12	Overhang Back	1603mm	63"
13	Lift Stroke	2280mm	89"
A	Capacity	35,000kg	77,000lbs
B	Unladen Weight	16,500kg	36,400lbs
C	Gradeability	5%	
D	Maximum Ground Speed	6 km/h	4 mph
E	Kubota V3800 T Diesel	73kW	96hp
F	Electric's	12 Volt	
G	Tyres	Super Elastic	
H	Standard Colour	Yellow & Grey	Yellow & Gray
I	Suspension Seat	KAB Model 116	

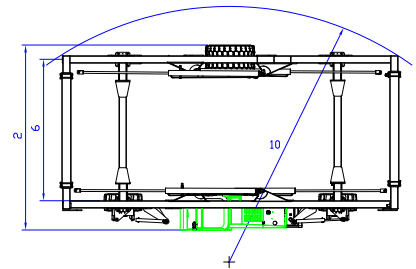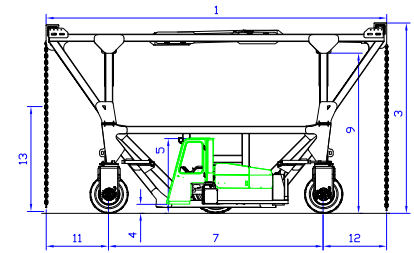

BENEFITS:

- Low Ground Pressure When Fully Loaded
- Narrow Aisle Driveways
- Excellent 360° Visibility From Driver Position
- Can Travel In/Out Of Warehouse
- Safer Loading / Unloading At Ground Level
- Eliminates Trailers Waiting To Be Loaded And Unloaded
- Allows Safer Stuffing/Destuffing Of Container At Ground Level

STANDARD FEATURES:

- 35 Tonnes/ 77,000lbs Lift Capacity
- 20', 30', 40', 45' Container Sizes Handled
- 2-Wheel Hydrostatic Drive
- 2-Wheel Steer
- Capable Of Travelling Fully Loaded
- Front And Rear Independent Sideshift For Easy Twistlock Alignment

Distributed by

OPTIONAL EXTRAS:

- Fully Enclosed Cabin
- Air Conditioning
- Overall Dimensions Can Be Customised To Handle Non-ISO Containers
- Stack Containers 2 High

www.COMBiLiFT.com | INFO@COMBiLiFT.com

COMBiLiFT HQ: Co. Monaghan, Ireland Tel: + 353 47 80500 Fax: + 353 47 80501

COMBiLiFT USA: 303 Concord Street, Greensboro, NC 27406 Tel: 1877 266 2456

COMBiLiFT UK: 07870976758 **COMBiLiFT AUSTRALIA:** 1300 552 422